

MAXUM

Next Generation
DC Commercial Door Operators

JHDC HOIST



Scan to learn more about
the JHDC Hoist

Fast. Smart. Simple.

LiftMaster

POWERED BY myQ.

JHDC HOIST

LiftMaster® is pioneering MAXUM, the next generation of innovation for commercial door automation. This all-new commercial door operator is a state-of-the-art platform that introduces next-level versatility in a sleek, purpose-built design that's easier to install and service. With unrivaled performance and intelligence, the new line-up will help today's commercial facilities take the next step toward a smarter future.

Popular Features

Smooth Start/Stop Operation

Extends the life of the operator and door hardware.

Faster Speed

Average of 12" per second opening on sectional doors, and 8-9" per second on rolling steel doors.

Floor Level Wall Controller

4-line LCD display gives you access to more information at all times. Bringing programming, troubleshooting and Diagnostics down to the floor level will save you time and money.

Battery Backup Capable

Provides seamless operation by providing standby power when the power is down.

Advanced Diagnostics and Troubleshooting

No more flashing LEDs. Receive real-time alerts and relevant information at your fingertips.

Wi-Fi®

Connect to myQ Facility via Wi-Fi for visibility into what is happening at your door and control it from your web browser. No need for additional hubs or accessories. Know what accessories activate the door (remote, keypad, etc.).

Security+ 2.0 on Board Radio Receiver

Manage up to 90 controllers.



Motor

Built with a high efficiency motor and gearbox. Provides an adequate amount of power needed to move your sectional or rolling door installations.

Lighter Weight

The new Hoist operator is 30 lbs. lighter than the 1/2 HP Logic 5.0 operator.

Control Board

Designed to have everything at your fingertips. The new push and play terminals are designed with you in mind. Just press down and secure your wires, no tools necessary. Color coded terminals for easy identification of all your wiring needs.

3 Monitored Entrapment Protection Inputs

Protect up to 3 entrapment protection points with every installation.

UL® Listed

LiftMaster Commercial Door Operators are listed to ANSI/CAN/UL325 Standard for USA/Canada and are certified to NOM/IFETEL Standards for Mexico.


Industrial-Grade Design

Durable metal chassis frame and plastic E-Box offers strength and flexibility with installation. E-Box hinge design allows for easy cover removal for enhanced accessibility.

Connect and stay on top with myQ Facility.

Enhanced Features:

- Door Monitor and Control
- Enhanced Diagnostics and Error Codes
- Cycle Counts (Operator Absolute & Service)
- Simple device provisioning process, stable connection to the cloud
- Timely sensing throughout door travel
- Cloud Access Control
- Transmitter Management
 - Unlock 1,000 learned transmitter capabilities to track specific people tied to those transmitters

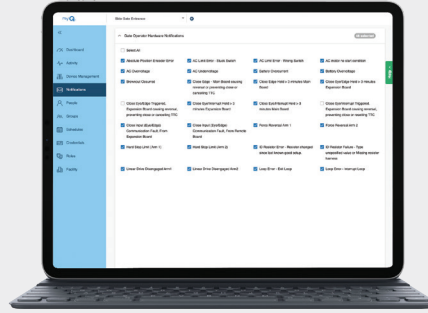

myQ Facility is a cloud-based solution that keeps you up to date and in control of all of your facility's access points. This allows you to work smarter, improve efficiencies and reduce expenses.*

*When linked with an access control, Powered by myQ, cellular data or Wi-Fi connection required. Test equipment regularly and follow safety instructions.

Included Accessories

CPS-U

Monitored Through-Beam Photo Eye

The CPS-U is a proven design photo eye and engineered for ease of alignment at installation; max. range: 30 ft.



NEMA 4X units include CPS-UN4


DCWALLCTL

Floor Level Wall Controller

Menu based user interface allows you to scroll through, edit and save options and settings easily. 4-line LCD display gives you convenient access to even more information in seconds.

Faster Setup and Added Personalization: Allows the user to only access settings and options needed for installation

Increased Security: This user interface gives customers peace of mind by requiring a password-protected code to access any door and alter speed settings.

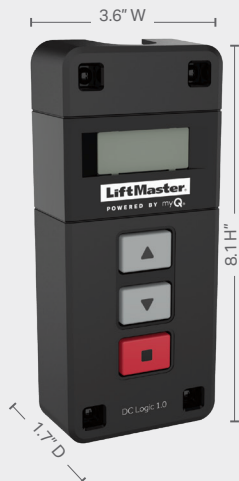

Recommended Accessories

Edges and Wireless Edge Devices

A contact edge sensor stops and/or reverses a moving door when sensing an obstruction in its pathway. Add the LMWEKITU to eliminate the need for wiring between LiftMaster Monitored Resistive Edges and our new Commercial Door Operators.

Loop Detectors/Loops (LPEXP)

Loops prevent the door from closing on a vehicle in its path with strong sensors and wires installed in the ground. Add the LOOPDETLM detector, which plugs into the board for ease of installation.

Auxiliary Relay Board (AUXREL)

Easy to install accessory board for auxiliary limit switches, lights, bells, horns, strobes, and other devices.

Red/Green Light (RGL-CTL)

18 red/green high-intensity LEDs: suitable for single lane operations and clear visibility.

Monitored Light Curtain (LC36M)

Provides up to 33 ft. of protection range and a minimum of 36 in. of height coverage to keep your equipment safe.

Cable Tension Monitors

K41-0157-000-Commercial CTM (Right)

K41-0156-000-Commercial CTM (Left)

Easy to install. Provides additional door and operator protection by reversing a closing door if excess cable slack is detected.

CHAITENSDC - Chain Tensioner

Recommended Door Sprocket Tables (Note: Door Sprockets sold separately.)

Sectional Doors Recommended Door Sprockets						
Drum Diameter (Large end of Conical Drum)	Door Sprocket for Desired Speed					
	For 12 inches/sec Door Speed			For 9 inches/sec Door Speed		
	Tooth Count	1 in. Bore 1/4 in. Keyway	1.25 in. Bore 1/4 in. Keyway	Tooth Count	1 in. Bore 1/4 in. Keyway	1.25 in. Bore 1/4 in. Keyway
4"	16-Tooth	71-1550B16LGH	71-1550B16QGH	22-Tooth	71-1550B22LGH	71-1550B22QGH
5.25"	22-Tooth	71-1550B22LGH	71-1550B22QGH	32-Tooth	71-1550B32LGH	71-1550B32QGH
5.75"	24-Tooth	71-1550B24LGH	71-1550B24QGH	34-Tooth	71-1550B34LGH	71-1550B34QGH
6.375"	32-Tooth	71-1550B32LGH	71-1550B32QGH	42-Tooth	71-1550B42LGH	71-1550B42QGH
8"						
8.5"	24-Tooth	71-1550B24LGH	71-1550B24QGH	34-Tooth	71-1550B34LGH	71-1550B34QGH
11"	32-Tooth	71-1550B32LGH	71-1550B32QGH	42-Tooth	71-1550B42LGH	71-1550B42QGH
13.5"	42-Tooth	71-1550B42LGH	71-1550B42QGH	56-Tooth	71-1550B56LGH	71-1550B56QGH
Not Sure*	22-Tooth	71-1550B22LGH	71-1550B22QGH			
	32-Tooth	71-1550B32LGH	71-1550B32QGH	32-Tooth	71-1550B32LGH	71-1550B32QGH
				42-Tooth	71-1550B42LGH	71-1550B42QGH

* 700 & 1200 series operators use 22 & 32 tooth; 2200 series operators use 32 & 42 tooth

Rolling Doors, Uninsulated Recommended Door Sprockets						
Max 20ft Door Height - 8-9 inches/sec Door Speed						
Operator Series	Door Weight	Tooth Count	1 in. Bore 1/4 in. Keyway	1.25 in. Bore 1/4 in. Keyway	1 in. Bore 3/8 in. Keyway	1.25 in. Bore 3/8 in. Keyway
700	up to 450 lbs	50-Tooth	71-1550B50LGH	71-1550B50QGH	71-1550B50LKH	71-1550B50QKH
	450 to 700 lbs	72-Tooth	71-1550B72LGH	71-1550B72QGH	71-1550B72LKH	71-1550B72QKH
1200	700 to 1200 lbs					
2200	1200 to 1800 lbs	82-Tooth	71-1550B82LGH	71-1550B82QGH	71-1550B82LKH	71-1550B82QKH
	1800 to 2200 lbs					

Rolling Doors, Insulated Recommended Door Sprockets						
Max 20ft Door Height - 8-9 inches/sec Door Speed						
Operator Series	Door Weight	Tooth Count	1 in. Bore 1/4 in. Keyway	1.25 in. Bore 1/4 in. Keyway	1 in. Bore 3/8 in. Keyway	1.25 in. Bore 3/8 in. Keyway
700	up to 450 lbs	60-Tooth	71-1550B60LGH	71-1550B60QGH	71-1550B60LKH	71-1550B60QKH
1200	450 to 900 lbs	72-Tooth	71-1550B72LGH	71-1550B72QGH	71-1550B72LKH	71-1550B72QKH
2200	900 to 2000 lbs	82-Tooth	71-1550B82LGH	71-1550B82QGH	71-1550B82LKH	71-1550B82QKH

Features

Mechanic

- 24VDC Motor Drive
- 65:1 Gearbox with #50 Chain
- Electromechanical Brake for operators that support 700 lbs. and 1200 lbs. doors, 2200 lbs. operators brake is standard
- Dual Handing: right or left no longer required for order
- Mounted Keyhole Slots: created for installers to easily access and fasten the operator to the wall
- Removable Front Cover
- Captive E-Box screws: remain in place when opening and removing cover

Business Partners

For Sales | 800.282.6225

For Technical Support | 800.528.2806

For Billing | 800.323.2276

To Learn More | LiftMaster.com

Power

- 120Vac 1 PH/240Vac 1/3PH; 480Vac 3PH; 208Vac 3PH (via transformer); 600Vac 3PH (via transformer)

Temperature

Without heater	-4°F (-20°C) – 140°F (60°C)
With heater (HTR)	-40°F (-40°C) – 140°F (60°C)

Dimensions

Operator 700 lb. / 9.8" W x 25.7" H x 12.1" D
 Operator 1200 lb. / 9.8" W x 26.0" H x 12.1" D
 Operator 2200 lb. / 11.6" W x 33.1" H x 12.6" D
 Floor Level Wall Controller / 3.6" W x 8.1" H x 1.7" D

Warranty

- 2 years commercial

Carton Contents

- Operator
- Antenna
- CPS-U (NEMA 4X units include CPS-UN4)
- DCWALLCTL
- 25 ft. of hoist chain (additional chain can be purchased separately)